



GB04/4716



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 28 DEC 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

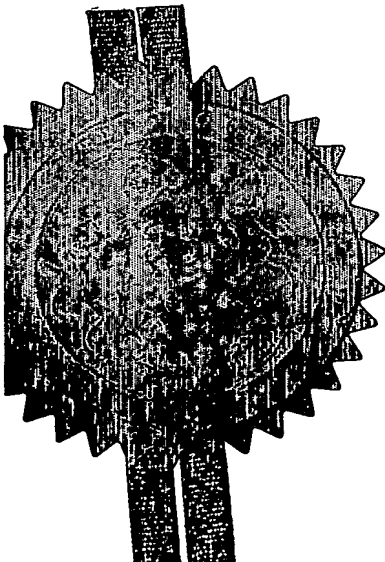

Signed *Andrew Gensey*  
Dated 18 November 2004

BEST AVAILABLE COPY

THE PATENT OFFICE  
SN  
- 3 AUG 2004  
RECEIVED BY FAX

The  
Patent  
Office

03AUG04/E916136-1 D02973  
F01/7700 0.00-0417279.7 ACCOUNT CHA

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

NPS/P104214GB2

2. Patent application number

(The Patent Office will fill in this part)

0417279.7

3 AUG 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The Engineering Business Limited  
Broomhaugh House  
Riding Mill  
Northumberland  
NE44 6EG

Patents ADP number (if you know it)

7394240001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

Access Methods and Apparatus

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Belgrave Hall  
Belgrave Street  
Leeds  
LS2 8DD

Patents ADP number (if you know it)

14571001 7631310002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

GB

0326147.6

10-11-2003

GB

0403362.7

16-02-2004

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

a) any applicant named in part 3 is not an inventor, or

Yes

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description	17
Claim(s)	6
Abstract	1
Drawing(s)	109

only 52

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

Fee Sheet

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

03 August 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Nigel Sanderson

0113 233 0100

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

## **Access Methods and Apparatus**

The present invention relates to method and apparatus for providing access from a vessel, in particular a relatively small vessel, to a relatively larger vessel or to a fixed offshore structure.

When working at sea, or on similar large body of water such as larger lakes, it is often necessary for personnel to transfer from a relatively small boat ("transfer vessel") employed to carry them to a worksite onto the worksite itself. The worksite might be a larger vessel, such as when a pilot needs to board the larger vessel, or a fixed offshore structure such as an oil or gas rig, wind turbine or the like where maintenance workers need access from time to time. (Given that the motion of a larger vessel is usually much less relative to the motion of a smaller transfer vessel, the term fixed structure will be used hereinafter to refer to both fixed offshore structures and relatively larger vessels, unless the context requires otherwise). Conventionally, a worker is required to step from the transfer vessel onto a flexible or rigid ladder or onto a rigid gangway at the side of the fixed structure. This is hazardous, particularly for those who are not accustomed to working in a marine environment. In all but the calmest of seas, relative motion between the transfer vessel and the fixed structure is substantial. Stepping from a moving transfer vessel onto a stationary ladder is difficult and it is easy to slip and, potentially, to fall into the water. This carries the danger of being crushed between the transfer vessel and the fixed structure. Because of the motion of waves and the effect of currents it is, in any case, difficult to keep the transfer vessel on station, i.e. in the correct position with respect to the fixed structure, and there is also the danger of collision between the transfer vessel and the fixed structure.

For these reasons, safety regulations limit the transfer of personnel from a transfer vessel to a fixed structure to times when the sea conditions are within certain parameters, typically to circumstances where the wave height is less than about 0.7m to 1m. The consequence of this is that many working days are lost when wave conditions are such that access to the fixed structure is not possible. This can

represent a major expense for those involved in the construction and maintenance of offshore facilities.

5 The present invention seeks to alleviate these problems by providing a method and apparatus which allow safe access from a transfer vessel to offshore fixed structures, especially in a greater range of sea conditions.

According to a first aspect of the present invention, there is provided a method of providing access from a transfer vessel to a fixed structure comprising:

- 10 providing at least one guide wire on the transfer vessel;  
connecting the at least one guide wire between a location on the transfer vessel and an attachment location on the fixed structure proximate the location of entry to the fixed structure;  
controlling the transfer vessel so that it is maintained in spaced apart relation to
- 15 the fixed structure and so that the at least one guide wire is maintained at a desired tension;  
providing at least one inflatable member attached to a said guide wire by means of a plurality of slidable fixings, the inflatable member being transformable from a compacted state to an extended state by inflation thereof;
- 20 inflating the inflatable member with an inflating fluid such that the slidable fixings slide along a said guide wire and the inflatable member expands from its compacted state to its extended state to span the gap between the transfer vessel and the fixed structure.
- 25 Preferably the method further comprises providing two guide wires and connecting said guide wires between a location on the transfer vessel and points on the fixed structure proximate the location of entry to the fixed structure.

30 In an alternative variation the method further comprises providing a single inflatable member with a guide wire at respective sides thereof.

According to a second aspect of the invention there is provided apparatus for providing a bridge structure for the transfer of personnel from a transfer vessel to a fixed structure comprising:

- 5     at least one inflatable member being transformable from a compacted state to an extended state by inflation thereof;
- means for inflating the inflatable member;
- at least one guide wire extendable from the transfer vessel to an attachment location on the fixed structure proximate the location of entry to the fixed structure;
- 10    means for applying a desired tension to the at least one guide wire;
- a plurality of slidable fixings slidable along a said guide wire on inflation of the at least one inflatable member, by means of which fixings the at least one inflatable member is operatively suspendable from the at least one guide wire.

- 15    In one preferred variation, the apparatus comprises a single inflatable member.

In alternative preferred variations, the apparatus comprises a plurality of inflatable members which are independently inflatable.

- 20    Preferably the apparatus comprises at least one inflatable member which, in its expanded state, has an upper surface which operatively forms a walkway for personnel using the bridge structure.

- 25    In another preferred variation, the apparatus further comprises means for joining two or more inflatable members together to form said walkway.

Preferably, said two or more inflatable members are joined in side-by-side relation.

- 30    In another preferred arrangement the apparatus further comprises inflatable members defining in their expanded state side walls of the bridge structure.
- Preferably, the apparatus further comprises means for joining two or more inflatable members together to form said side walls, said two or more inflatable members preferably being joined in side-by-side relation.

Where the apparatus comprises a single inflatable member, preferably an upper surface said inflatable member operatively forms a walkway for personnel using the bridge structure. In one preferred variation said upper surface includes a non-slip surface.

Preferably, the apparatus further comprises a plurality of upright posts attached at intervals to said inflatable member and ropes or nets attached to said posts.

10 In another preferred variation the apparatus further comprises at least one safety rope extending lengthwise of the bridge to which a user's safety harness is operatively attachable.

15 In one configuration of the invention, the at least one inflatable member is, in its expanded state, operatively suspended below a single guide wire.

Alternatively, the at least one inflatable member may be, in its expanded state, operatively suspended between a pair of substantially parallel guide wires.

20 According to a third aspect of the invention there is provided a transfer vessel having mounted thereon apparatus defined in the second aspect of the invention. Preferably the transfer vessel comprises an inflatable boat, in particular an RIB.

25 According to a fourth aspect of the invention there is provided a mounting structure for mounting an apparatus as defined in the second aspect of the invention on a transfer vessel, comprising at least one of:

- i) means for accommodating rotational movement of the transfer vessel with respect to the apparatus;
- ii) means for accommodating translational movement of the transfer vessel with respect to the apparatus; and
- 30 iii) means for accommodating pitching movement of the transfer vessel with respect to the apparatus.

According to a fifth aspect of the invention there is provided a mounting structure for mounting an apparatus as defined in the second aspect of the invention on a transfer vessel comprising:

- 5 a first mounting component mounted in rotatably fixed relation to the vessel
- a second mounting component mounted on the first mounting component and attached in rotatably fixed relation to the apparatus, the first and second mounting components being rotatable with respect to one another.

Preferably, the first and second components define a slew ring bearing.

- 10 Preferably the mounting structure further comprises a first frame element disposed between the second component and the apparatus and mounted with translational freedom of movement with respect to the second mounting component. (In less preferred variations of the invention, means for allowing translational movement
- 15 between the vessel and the apparatus may be provided in the absence of the means for permitting rotational movement).

- 20 In another preferred embodiment the mounting structure further comprises biasing means adapted to bias the first frame element towards a desired location in its translational motion.

- 25 Preferably also the mounting structure further comprises a second frame element pivotally mounted with respect to the second mounting component operatively attached to the apparatus, wherein the second frame element operatively pivots about a nominally horizontal axis substantially perpendicular to the longitudinal axis of the at least one inflatable member when extended. (Again, in less preferred variations of the invention, the above pivot means may be provided in the absence of the means for allowing rotational and/or translational movement between the transfer vessel and the apparatus). In the most preferred embodiments of this
- 30 aspect of the invention means for allowing all three of rotational, translational and pivoting movement are provided.



Preferably the second frame element is pivotally mounted on the first frame element.

5 According to a sixth aspect of the invention there is provided transfer system comprising a mounting structure as defined above and an apparatus as defined in the second aspect of the invention attached thereto.

10 A seventh aspect of the invention provides a transfer vessel having mounted thereon a mounting structure as defined above.

An eighth aspect of the invention provides a transfer vessel having mounted thereon a transfer system according to the sixth aspect of the invention. Preferably the transfer vessel is an inflatable boat, in particular an RIB.

15 For a better understanding of the invention and to show how the same may be carried into effect, reference will be made, by way of example only, to the following drawings, in which:

20 Figure 1 is a diagrammatic representation of an apparatus of the invention when mounted between a transfer vessel and a fixed offshore structure;

Figure 2 is a schematic plan view of an apparatus of the invention when mounted between a transfer vessel and a fixed offshore structure;

25 Figures 3 and 4 are schematic cross sections through typical embodiments of the apparatus of the invention;

Figure 5 is a schematic end view of a mounting means according to the invention when attached to an apparatus of the invention;

30 Figure 6 is a schematic plan view of the apparatus of Figure 5;

Figure 7 is a side view of the apparatus of Figure 5;

P104214GB2

Figures 8a and 8b are diagrammatic side views of an apparatus and mounting means according to the invention when arranged on a transfer vessel;

- 5 Figure 9 is a diagrammatic plan view of an apparatus and mounting means according to the invention when arranged on a transfer vessel; and

Figures 10a to 10c show diagrammatically the deployment of the apparatus of the invention from an RIB;

10

Figure 11 is a diagrammatic side view of an apparatus according to another embodiment of the invention when mounted on a transfer vessel;

- 15 Figure 12 is a diagrammatic side view of the apparatus of Figure 11 when partially deployed;

Figure 13 is a diagrammatic side view of the apparatus of Figure 11 when fully deployed;

- 20 Figures 14, 15 and 16 are diagrammatic plan views showing stages in the attachment of guide wires from a transfer vessel to a fixed structure, in accordance with the invention;

- 25 Figure 17 is a diagrammatic plan view of a transfer vessel and an apparatus of Figure 11, in a partially deployed state;

Figure 18 is a diagrammatic plan view of a transfer vessel and an apparatus of Figure 11 in a fully deployed state;

- 30 Figure 19 is a diagrammatic plan view showing an alternative arrangement of a guide wire extending between a transfer vessel and a fixed structure; and

Figure 20 is a diagrammatic plan view showing a further alternative arrangement of a guide wire extending between a transfer vessel and a fixed structure.

Referring now in particular to Figures 1 and 2, there is shown an apparatus 10 according to the invention which provides a bridge for personnel to transfer on foot from a transfer vessel 50 to a fixed offshore structure 70 and *vice versa*. In the embodiment illustrated, the fixed offshore structure is a part of a wind turbine, but the fixed offshore structure could equally be a larger vessel (in relation to the transfer vessel 50), a coastal structure such as a sea wall, breakwater or jetty or even (although less likely) a vessel of similar size to the transfer vessel 50.

When installed between the transfer vessel 50 and the fixed offshore structure 70, the apparatus 10 provides a means by which personnel such as commissioning or maintenance personnel for a wind turbine can step between the transfer vessel 50 and the fixed structure 70 with greater safety and in a wider range of sea conditions. At its point of attachment to the fixed structure 70, the relative motion of the apparatus 10 with respect to the fixed structure 70 is slight, or even negligible, and similarly the relative motion between the apparatus 10 and the vessel 50 at the point where the apparatus 10 meets the vessel is minimised, despite the fact that the transfer vessel may be pitching, rolling or moving back and forth by action of the waves on the vessel 50. Thus the health and safety risks associated with stepping from a vessel 50, moving unpredictably because of wave motion, to the fixed structure 70 are eliminated.

In summary, the apparatus 10 uses one or more tensioned ropes 12 extending between the vessel 50 and the fixed structure 70 from which one or more inflatable members are suspended. When inflated, the inflatable members 14 extend from the vessel 50 to the fixed structure 70 and provide a safe walkway for the transfer of personnel. Also, the vessel 50 is allowed considerable freedom of movement in maintaining its station with respect to the fixed structure 70, which allows the vessel operator to adjust the position and/or heading of the vessel to accommodate prevailing weather conditions. Further, in the unlikely event that the apparatus 10 should fail, the apparatus falls into the water and, because of the inflatable

member(s) 14, the apparatus floats, so providing a safe refuge for personnel until rescue can be effected.

5 In use, the apparatus 10 is provided in its compact (non-inflated) state on the transfer vessel 50. The transfer vessel 50 is brought a location proximate the fixed structure 70 and at least one, but preferably two wires 12 carried by the vessel 50 are connected to the fixed structure 70 at a suitable location 74 of entry onto the structure, such as a ladder 72 or platform on the fixed structure 70. The location 70 is most preferably at a point which is above the maximum wave height in the prevailing conditions. On the transfer vessel 50 the wires 12 are attached to means for maintaining a substantially constant tension in the wires 12. Suitable means include winches 16 fitted with constant tension devices. Such winches 16 are known in the art.

15 When connection by means of wires 12 between the transfer vessel 50 and the fixed structure 70 by means of the wires has been established, the transfer vessel may adjust its location to a position further away from the fixed structure 70. In the chosen location, the transfer vessel 70 thrusts away from the fixed structure 70 but is restrained from moving away by the wires 12. Thus the desired tension is maintained in the wires 12.

The apparatus 10 comprises a plurality of slidable fixings 18 through which a wire 12 passes. The slidable fixings 18 connect the inflatable members 14 to the wire(s) 12, whereby the inflatable members 14 may be suspended from the wire(s) 12.

25 The slidable fixings 18 may conveniently include rings through which a wire 12 passes. To establish the walkway between the transfer vessel 50 and the fixed structure 70, the inflatable members 14 are inflated with a suitable inflation fluid which is most conveniently air. The air may be pumped into the inflatable members 14, or may be supplied from an air storage source such as compressed air cylinders.

30 The inflatable members 14 each take the form of a longitudinally extensive tube which, when extended, spans the gap between the transfer vessel 50 and the fixed structure 70. The tubes are preferably independently inflatable, so that any

inflation failure of one tube does not cause failure of others of the inflatable tubes 14. Thus, inflation of the inflatable members causes the slidable fixings 18 to slide along the wire(s) 12 as the inflatable members extend, until the inflatable members 14 are fully extended and suspended from the guide wire(s) 12. Thus, in its  
5 inflated state, the apparatus 10 of the invention, and in particular the inflatable members 14 extend from the vessel to the point of entry 74 to the fixed structure 70. In this state, the inflatable members 14 may be fixedly secured to the guide wire(s) 12 to prevent any retraction of the inflatable members 14.

- 10 In a preferred arrangement, safety ropes may be provided substantially co-extensive with the inflatable members 14 to which safety harnesses worn by personnel may be attached during transfer across the apparatus 10.

15 In using the apparatus 10, personnel step onto a surface defined (or supported) by an inflatable member 14. This transition is made from a safe area well within the deck area 52 of the transfer vessel 50, so that in the event of any slip or trip at this stage the person 54 remains on the deck 52. Personnel then move up the apparatus 10 by walking along the surface 56 until they reach the entry location 74 of the fixed structure where they can safely step onto the access ladder 72 or  
20 platform before unclipping their safety harness. The step onto the entry location 74 is easy in the absence of relative motion between the apparatus 10 and the fixed structure 70.

Referring in particular to Figures 3 and 4 it can be seen that the apparatus 10 of the  
25 invention may comprise a plurality of inflatable members 14a, 14b and 14c. In the embodiment of Figure 3, principal inflatable members 14a are attached to the slidable fixings which in turn are supported on a pair of guide wires 12. Inflatable members 14b define the surface on which personnel 54 may walk across the apparatus 10 and inflatable members 14c define side walls which assist in  
30 preventing personnel 54 from falling from the structure.

The construction of the embodiment in Figure 4 is similar, except that the inflatable members are suspended via slidable fixings 18 from a single guide wire 12. In each

of the embodiments of Figures 3 and 4 the individual inflatable members 14 may be joined one to another, but each is most preferably independently inflatable.

5 Although the apparatus 10 of the invention has been principally described above as employing a plurality of inflatable members 14, in another advantageous embodiment a single inflatable member 14d may be used. Such a construction is illustrated in Figures 5, 8a, 8b and 10. In this embodiment, an upper part of the inflatable member 14d provides a surface on which personnel 54 may traverse the apparatus 10. In preferred arrangements, this upper surface may be provided with  
10 a non-slip surface, such as a non-slip coating. In alternative arrangements, a surface 58 on which personnel 54 walk may be supported by an upper surface of the inflatable member 14d. Ideally in this embodiment, a plurality of upright posts 56 attached at intervals to said inflatable member 14d is provided and ropes or nets 57 are attached to said posts 56. The upright posts 56 may, for example, be  
15 attached in fixed relation to some of the slidable fixings 18, for example to every third fixing 18. In this way, when the apparatus 10 is in its compacted state, the upright posts 56 lie in close proximity to one another and become spaced apart as the inflatable member 14d achieves its expanded state (see in particular Figure 10a to 10c). Alternatively, the upright posts 56 may be separately attachable to the  
20 inflatable member 14d after its expanded state has been reached. Ropes or nets 57 extending between the upright posts 56 assist in preventing personnel 54 from falling from the apparatus 10 when traversing it, and a safety rope may be provided, attached for example to first and last upright posts 56, to which a safety harness be clipped. Cross members 60 may be provided which extend laterally  
25 between respective pairs of upright posts 56 for assisting in retaining the upright posts 56 in their desired position.

Figures 5 to 10 illustrate in particular mounting means 80 for use with the apparatus of the present invention which provides compliant freedom for the  
30 transfer vessel 50 with respect to the apparatus 10, so that the transfer vessel 50 can surge, traverse back and forth, pitch and roll with respect to the apparatus 10, in response to wave movement to which the transfer vessel 50 is subject, without adversely affecting the apparatus 10, its mountings or the fixed structure 70 and,

more especially in the case of smaller transfer vessels 50 such as RIBs, without allowing the apparatus 10 to adversely affect the transfer vessel 50.

Referring in particular to Figures 5 to 7 the mounting means 80 comprises a first mounting element 82 which provides the transfer vessel 50 and the apparatus 10 with rotational freedom with respect to one another. The first mounting element 82 comprises a first mounting component 84 which is fixedly attached to the deck of the transfer vessel 50 and a second mounting component 86, attached to the first mounting component and which also is (indirectly) attached to the apparatus 10. The mounting components 84, 86 have rotational freedom with respect to each other. A preferred form of the first mounting element 82 is a slew ring bearing. Thus, by means of the first mounting element 82, after the apparatus 10 of the invention has been attached to the fixed structure 70, the transfer vessel 50 is free to adopt a suitable heading, during the transfer of personnel 54, to favour the weather or sea conditions. A range of different headings is illustrated by positions A, B and C of the apparatus 10 in Figure 9. The heading is typically determined by weather, waves, currents or obstructions at the transfer site.

Attached to the second mounting component 86 is a first frame element 88. The first frame element includes first and second parts 88a, 88b which are slidably mounted with respect to one another. Specifically, part 88a is mounted in fixed relation to second mounting component 86 and part 88b is free to execute translational movement with respect to part 88a. The translation freedom of the part 88b with respect to part 88a accommodates the back and forth movement of the transfer vessel 50 with respect to the apparatus 10, as can be seen from a comparison of Figures 8a and 8b. The permitted movement of the vessel which is accommodated is indicated by arrows D-D.

In a preferred embodiment, a bias is applied to the second frame element part 88b, most preferably to urge the part 88b towards the mid point of its permitted translational motion. Suitable biasing means include elastic cord (e.g. shock cord) or rate controlled damping systems. One important objective of the biasing means is to provide a method of force limitation to prevent excessive force being applied to

the vessel. The bias forces applied to the part 88b may be symmetrical or asymmetrical with regard to the two opposed direction of permitted movement of the part 88b.

5 Locking means may be provided to independently lock the first mounting element 82 to prevent rotational movement and/or to lock the part 88b with respect to part 88a to prevent translational movement, as may be desirable for transport storage or stowage of the apparatus 10.

10 An upper part of the component 88a may preferably define a surface 88c on which personnel may stand before stepping onto the apparatus 10. Although the surface 88c may itself be subject to translational and or rotational movement, there is little, if any, movement with respect to the apparatus 10. This stepping from the deck 52 onto the surface 88c is simple, as is stepping from the surface 88c onto the  
15 apparatus 10.

A second frame element 90 is attached to the end of the apparatus 10 to support the apparatus 10 in use. The second frame element 90 is also pivotally connected at 92 to the first frame element part 88b, so that the second frame element 90 and  
20 the first frame element part 88b pivot with respect to one another about an axis E-E which is nominally horizontal and which is substantially perpendicular in use to the longitudinal axis of the inflatable member(s) 14. "Nominally horizontal" is used in the sense that the pivot axis would be substantially horizontal when the transfer vessel 50 is on a flat calm sea. Of course, in more usual sea conditions, some  
25 variation from the true horizontal is inevitable. The pivotal connection 92 accommodates pitch and roll of the transfer vessel 50 caused by wave motion. Further the pivotal connection 92 may allow the apparatus 10, in its compact state, to be retained in a safe stowage position as indicated in Figure 10a. When required for use, the apparatus 10, supported in second frame element 90 may be pivoted  
30 about axis E-E to its use position (Figure 10b), prior to inflation of the inflatable member(s) 14 (Fig 10c).



- In preferred arrangements using the mounting means 80, the wires 12 may terminate on the second frame element 90. The connection between the wires 12 and the second frame element 90 may desirably be designed to break at a predetermined force in order to limit tensile forces applied to the transfer vessel 50 by the apparatus 10 in use. Also, the attachment between the end of the apparatus 10 and the second frame element 90 may desirably be designed to fall in the event of excessive force, thereby to allow the vessel to move away from the apparatus 10, for example in severe weather conditions.
- Although the mounting means 80 has been primarily described in relation to an apparatus 10 comprising a single inflatable member 14d, the mounting means are also suitable for use with apparatus 10 including a plurality of inflatable members 14, such as are illustrated in Figures 3 and 4.
- An alternative embodiment of the apparatus of the invention is shown in Figures 11 to 20. In this alternative embodiment, the apparatus 100 is maintained in its inflated state for all or part of its working or operational period, that is, in addition to the specific time when the apparatus is disposed between a transfer vessel 150 and a fixed structure 170. For example, a work site where the apparatus 100 of this embodiment of the invention is deployed may include a number of fixed structures 170, such as wind turbines, to or from which personnel are transferred at various times during the operational period. In this case it is inconvenient to deflate and re-inflate the apparatus 100 each time it is transferred between one fixed structure 170 and another. Accordingly, in this embodiment of the invention the apparatus 100 is maintained in its inflated state at least for movement of the apparatus 100 from one fixed structure 170 to another fixed structure 170. For longer movements, e.g. journeys to the work site from the transfer vessel's home port, the apparatus 100 may be in its deflated state.
- In accordance with this embodiment of the invention, the transfer vessel 150 is provided with at least one slider 110 on which one end of the apparatus 100 is mounted. The slider 110 is preferably a rigid rail or, more preferably, a pair of rails, one which the apparatus 100 is slidably mounted. The rails are preferably

rectilinear, but may, if appropriate, be curved. In other constructions, the slider may be, for example, one or more tensioned wires or cables. In figures 14 to 20, a pair of rails 111, 112 is shown.

- 5 Rails 111, 112 are fixedly mounted on the transfer vessel 150. In the illustrated example, the rails 111, 112 extend in parallel from a highest point near the central region of the vessel 150 to a lowest point near the stern of the vessel 150. As can be seen in particular in Figure 11, the apparatus 100 is carried during movement of the vessel between fixed structures 170 (and during any other movements, as  
10 required) on the rails 111, 112 so that one end 114 of the apparatus is towards the upper and of the rails 111, 112 and one end 116 of the apparatus is towards the lower end of the rails 111, 112. The end 114 of the apparatus 100 is preferably permanently attached to the rails 111, 112 and remains so attached when  
15 deployed, however, a releasable attachment is not precluded. The end 114 is attached by suitable means (not specifically shown) such as casters, which allow the end 114 to slide up and down the rails 111, 112 when required to do so. The end 116 may be (but need not be) releasably secured to the rails 111, 112.

- For deployment of the apparatus 100, firstly the guide wire or wires 120 are  
20 secured to the fixed structure 170, preferably by one of the methods as described below. If not already (i.e. permanently or semi-permanently) attached, the end 116 of the apparatus is attached to the or each guide wire 120. For the purposes of this example, of the apparatus, it is assumed that there are two guide wires 120. For example, the end 116 of the apparatus 100 may include one or more slots channels  
25 or other passageways through which the guide wires 120 pass. From the position shown in Figure 11, the apparatus 100 is caused to slide down the rails 111, 112 so that end 116 moves along the guide wires 120. For example, the apparatus may be moved with respect to the rails 111, 112 by means of a winch and cable arrangement, or other suitable means. The apparatus 10 is so moved until the end  
30 114 is at or near the end of the rails 111, 112 at which point it reaches its maximum extension with respect to the transfer vessel 150, as depicted in Figure 13. The position of the transfer vessel 150 is continuously monitored and adjusted as necessary so that the end 116 of the apparatus 100 is located in the desired

position with respect to the fixed structure 170 so that personnel may transfer easily from the apparatus 100 to the fixed structure. In preferred arrangements, the guide wires 120 are connected, on the transfer vessel 150, to winches 122, preferably constant tension winches whereby the transfer vessel 150 is maintained  
5 In approximately constant relation to the fixed structure 170 by adjustment of the length of the guide wires 120.

In a preferred embodiment, the transfer vessel 150 is provided with a foldable or collapsible ladder 130 which is stowed below the line of rails 111, 112 when not  
10 required for use, so as not to interfere with the deployment of the apparatus 100. In the illustrated example, the ladder 130 is in two parts 131, 132 which are pivoted with respect to one another and are connected by a linkage 134. Linkage 134 is connected to a pivoting post 136 which pivots about an axis at 138 to move the ladder 130 from its stowed to its deployed position.

15 Figures 14, 15 and 16 illustrate one method by which guide wires 120 are attached to fixed structure 170. In Figure 14, the transfer vessel 150 is shown approaching the fixed structure 170, with its bow 151 leading. When the transfer vessel 150 is proximate the fixed structure 170, guide wires 120 are attached to suitable  
20 attachment points on the fixed structure 170. As indicated above, the attachment points are so located that when the apparatus 100 is deployed, personnel may transfer safely from the apparatus 100 onto the fixed structure 170. Thus, in particular, the attachment points will normally be so located that the deployed apparatus 100 is above the maximum wave height. In the example of Figures 14 to  
25 18, two guide wires 120 extend in parallel from the transfer vessel 150 to the fixed structure 170. Each guide wire 120 includes a loop 124 at its end which is simply placed over, on or around an appropriate attachment point 172 on the fixed structure 170. The attachment point 172 may, for example include a locking or  
30 latching means which secures the loop 124 from becoming unintentionally detached.

As indicated in Figures 15 and 16, after the guide wires 120 have been attached to the fixed structure 170, the transfer vessel 150 is turned and manoeuvred into its

desired alignment and position with respect to the fixed structure 170. The alignment of the transfer vessel will depend on factors such as wind and sea conditions. The apparatus 10, 100 is then deployed as described above.

- 5 An alternative arrangement is shown in Figure 19 in which only one guide wire 120 is used. The guide wire 120 includes a single loop 124a at its end which is placed over, on or around one or more suitable attachment means 172.

- 10 A further alternative arrangement is shown in Figure 20 in which a single guide wire 120 is also used. In this case, the guide wire has no loop 124. Rather, the leading end of the guide wire 120 is passed through suitable attachment means 172 on the fixed structure 170 and then returned to the vessel where it is preferably connected to a winch 122.

**Claims**

1. A method of providing access from a transfer vessel to a fixed structure comprising:
  - 5 providing at least one guide wire on the transfer vessel;
  - connecting the at least one guide wire between a location on the transfer vessel and an attachment location on the fixed structure proximate the location of entry to the fixed structure;
  - controlling the transfer vessel so that it is maintained in spaced apart relation to
  - 10 the fixed structure and so that the at least one guide wire is maintained at a desired tension;
  - providing at least one inflatable member attached to a said guide wire by means of a plurality of slidable fixings, the inflatable member being transformable from a compacted state to an extended state by inflation thereof;
  - 15 inflating the inflatable member with an inflating fluid such that the slidable fixings slide along a said guide wire and the inflatable member expands from its compacted state to its extended state to span the gap between the transfer vessel and the fixed structure.
- 20 2. A method as claimed in claim 1 comprising:
  - providing two guide wires and connecting said guide wires between a location on the transfer vessel and points on the fixed structure proximate the location of entry to the fixed structure.
- 25 3. A method as claimed in claim 2 wherein comprising providing a single inflatable member with a guide wire at respective sides thereof.
4. Apparatus for providing a bridge structure for the transfer of personnel from a transfer vessel to a fixed structure comprising:
  - 30 at least one inflatable member being transformable from a compacted state to an extended state by inflation thereof;
  - means for inflating the inflatable member;

- at least one guide wire extendable from the transfer vessel to an attachment location on the fixed structure proximate the location of entry to the fixed structure;
- means for applying a desired tension to the at least one guide wire;
- 5 a plurality of slidable fixings slidable along a said guide wire on inflation of the at least one inflatable member, by means of which fixings the at least one inflatable member is operatively suspendable from the at least one guide wire.
5. Apparatus as claimed in claim 4 comprising a single inflatable member.
- 10 6. Apparatus as claimed in claim 4 comprising a plurality of inflatable members which are independently inflatable.
7. Apparatus as claimed in claim 6 comprising at least one inflatable member
- 15 which, in its expanded state, has an upper surface which operatively forms a walkway for personnel using the bridge structure.
8. Apparatus as claimed in claim 7 comprising means for joining two or more inflatable members together to form said walkway.
- 20 9. Apparatus as claimed in claim 8 wherein said two or more inflatable members are joined in side-by-side relation.
10. Apparatus as claimed in claim 6, 7, 8 or 9 further comprising inflatable members
- 25 defining in their expanded state side walls of the bridge structure.
11. Apparatus as claimed in claim 10 comprising means for joining two or more inflatable members together to form said side walls.
- 30 12. Apparatus as claimed in claim 11 wherein said two or more inflatable members are joined in side-by-side relation.

13. Apparatus as claimed in claim 5 wherein an upper surface said inflatable member operatively forms a walkway for personnel using the bridge structure.
14. Apparatus as claimed in claim 13 wherein said upper surface includes a non-slip surface.
15. Apparatus as claimed in claim 5 or 13 further comprising a plurality of upright posts attached at intervals to said inflatable member and safety ropes or nets attached to said posts.
16. Apparatus as claimed in any of claims 4 to 15 further comprising at least one safety rope extending lengthwise of the bridge to which a user's safety harness is operatively attachable.
17. Apparatus as claimed in any of claims 4 to 16 wherein the at least one inflatable member is, in its expanded state, operatively suspended below a single guide wire.
18. Apparatus as claimed in any of claims 4 to 16 wherein the at least one inflatable member is, in its expanded state, operatively suspended between a pair of substantially parallel guide wires.
19. Apparatus as claimed in any of claims 4 to 17 for carrying out the method of any of claims 1 to 3.
20. A transfer vessel having mounted thereon apparatus as claimed in any of claims 4 to 19.
21. A transfer vessel as claimed in claim 20 comprising an inflatable boat, in particular an RIB.
22. Mounting structure for mounting an apparatus as claimed in any of claims 4 to 19 on a transfer vessel, comprising at least one of:

- i) means for accommodating rotational movement of the transfer vessel with respect to the apparatus;
- ii) means for accommodating translational movement of the transfer vessel with respect to the apparatus; and
- 5      iii) means for accommodating pitching movement of the transfer vessel with respect to the apparatus.

23. Mounting structure for mounting an apparatus as claimed in any of claims 4 to 19 on a transfer vessel comprising:

- 10      a first mounting component mounted in rotatably fixed relation to the vessel  
a second mounting component mounted on the first mounting component and attached in rotatably fixed relation to the apparatus, the first and second mounting components being rotatable with respect to one another.

15      24. A mounting structure as claimed in claim 23 wherein the first and second components define a slew ring bearing.

25      25. A mounting structure as claimed in claim 23 or 24 further comprising a first frame element disposed between the second component and the apparatus and mounted with translational freedom of movement with respect to the second mounting component.

26. A mounting structure as claimed in claim 25 further comprising biasing means adapted to bias the first frame element towards a desired location in its translational motion.

27. A mounting structure as claimed in any of claims 23 to 26 further comprising a second frame element pivotally mounted with respect to the second mounting component operatively attached to the apparatus, wherein the second frame element operatively pivots about a nominally horizontal axis substantially perpendicular to the longitudinal axis of the at least one inflatable member when extended.



28. A mounting structure as claimed in claim 27 wherein the second frame element is pivotally mounted on the first frame element.
29. A transfer system comprising a mounting structure as claimed in any of claims 5 23 to 28 and an apparatus as claimed in any of claims 4 to 18 attached thereto.
30. A transfer vessel having mounted thereon a mounting structure as claimed in any of claims 23 to 28.
- 10 31. A transfer vessel having mounted thereon a transfer system as claimed in claim 29.
32. A transfer vessel as claimed in claim 31 comprising an inflatable boat, in particular an RIB.
- 15 33. Apparatus substantially as hereinbefore described with reference to any of Figures 1 to 10.
34. Mounting structure substantially as hereinbefore described with reference to any 20 of Figures 5 to 10.
35. A method substantially as hereinbefore described with reference to any of Figures 1 to 10.
- 25 36. A transfer vessel having mounted thereon apparatus as claimed in claim 33.
37. A transfer vessel having mounted thereon a mounting structure as claimed in claim 34.
- 30 38. A transfer system comprising a mounting structure as claimed in claim 34 and an apparatus as claimed in claim 33 attached thereto.

39. A transfer vessel having mounted thereon a transfer system as claimed in claim  
38.

F104214GB2

**Abstract****Access Methods and Apparatus**

- 5 Access means are provided for accessing a fixed offshore structure such as a wind turbine, larger vessel or the like from a smaller transfer vessel. One or more guide wires are connected from the vessel to the fixed structure and placed in tension by directing the transfer vessel away from the fixed structure. Inflatable members are suspendable from the guide wires and inflation of the inflatable members causes
- 10 them to extend along the guide wires to form an access surface across which personnel may walk to access the fixed structure from the vessel. Mounting means are also provided which accommodate relative rotational, translational and pitching movement of the apparatus and vessel, caused by wave motion.

119

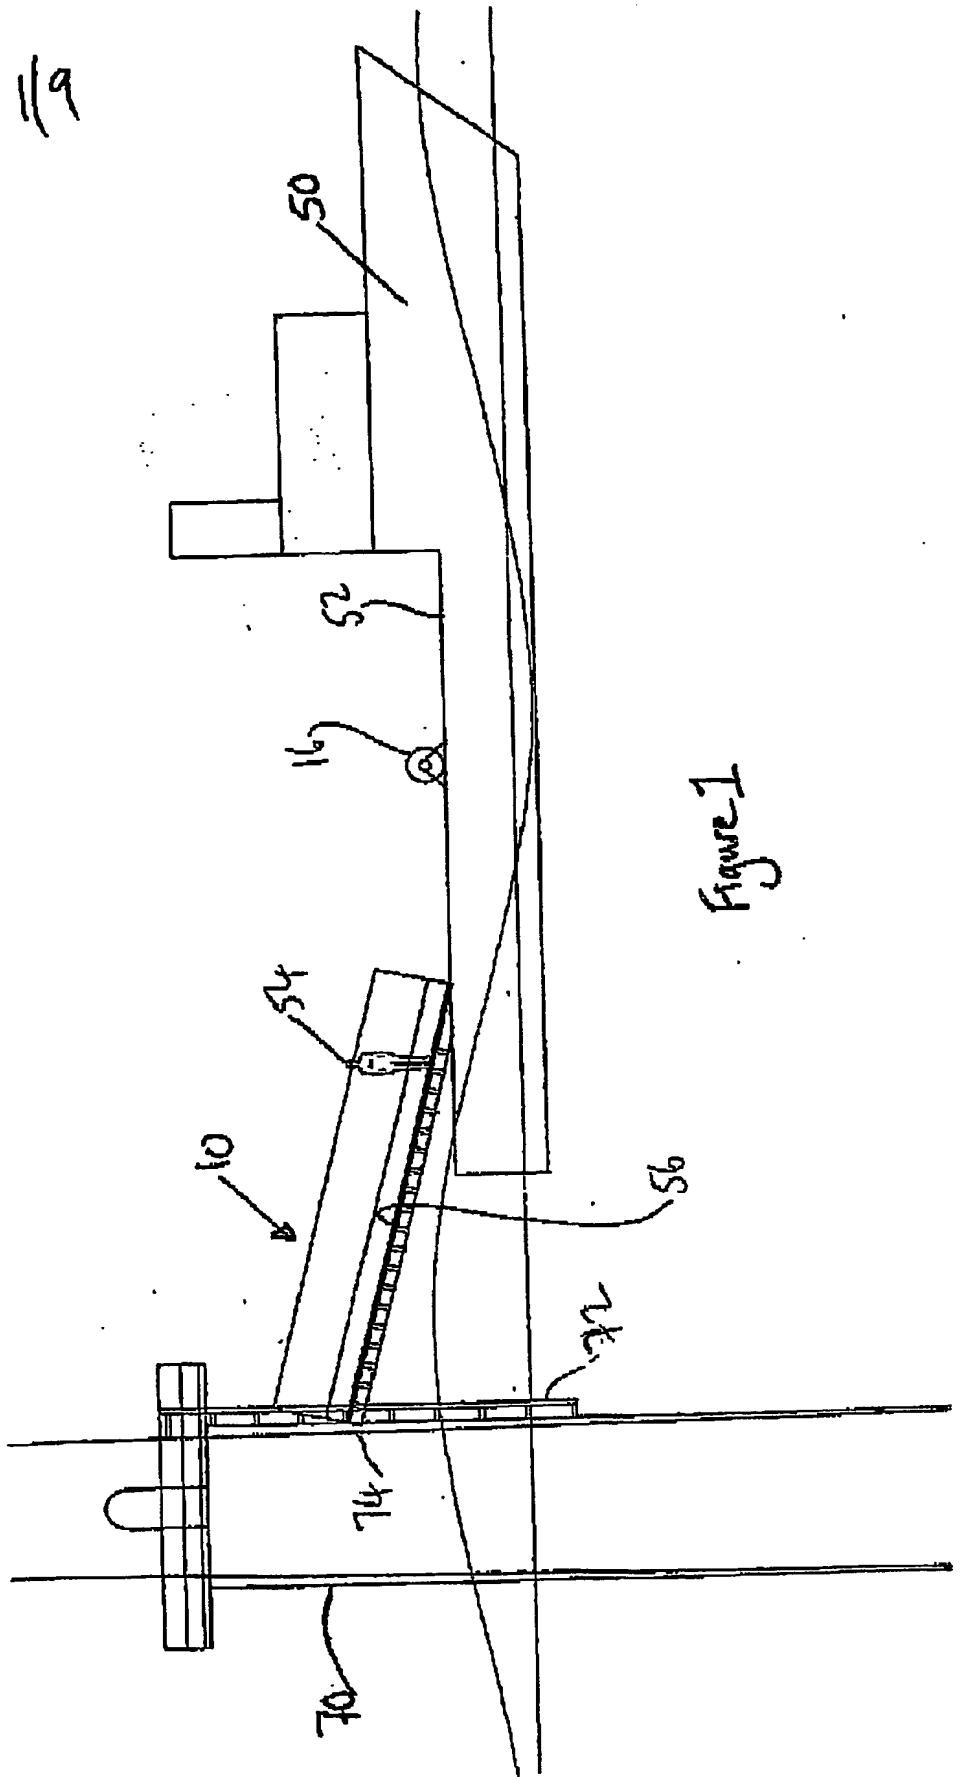


Figure 1

2(9

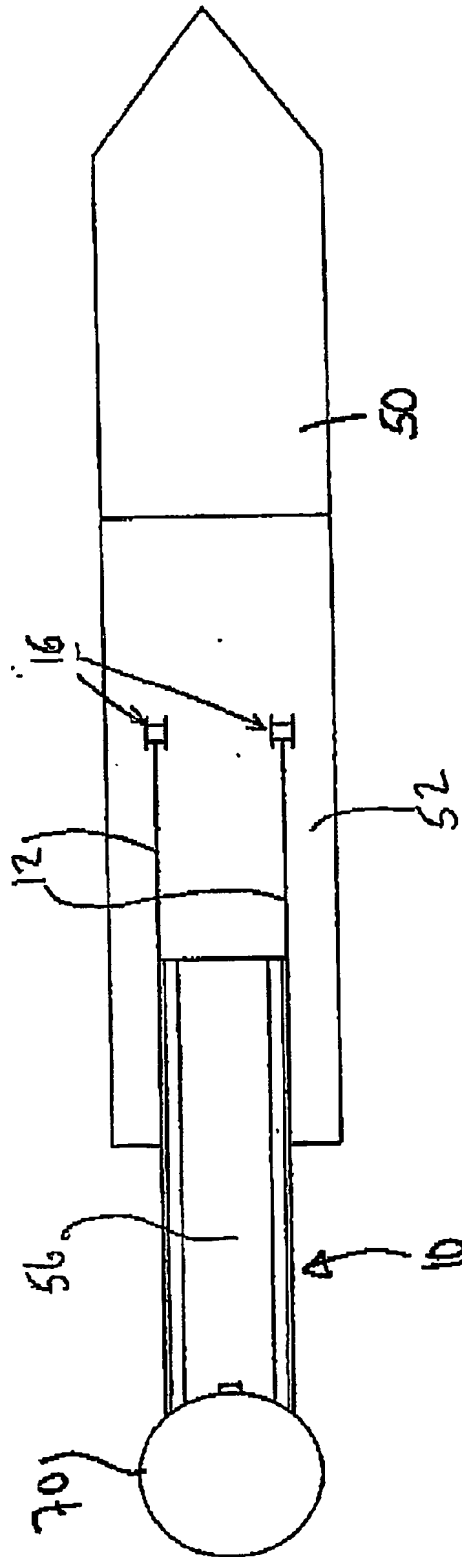


Figure 2

3/9

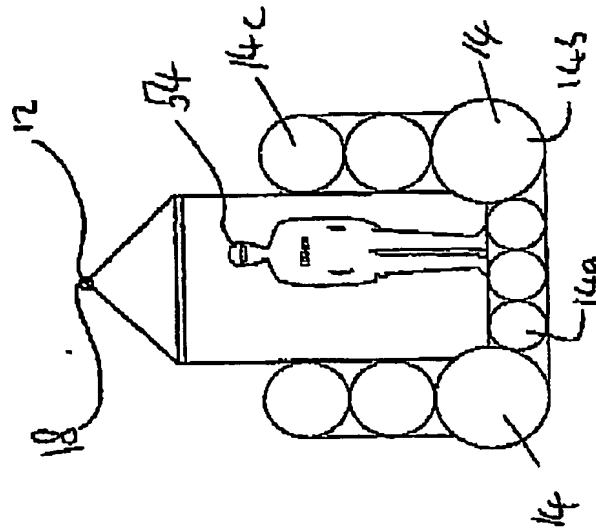


Figure 4







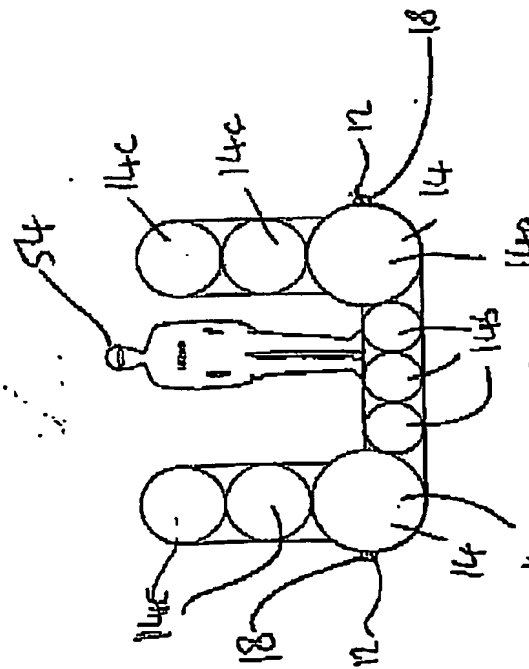


Figure 3


4/9

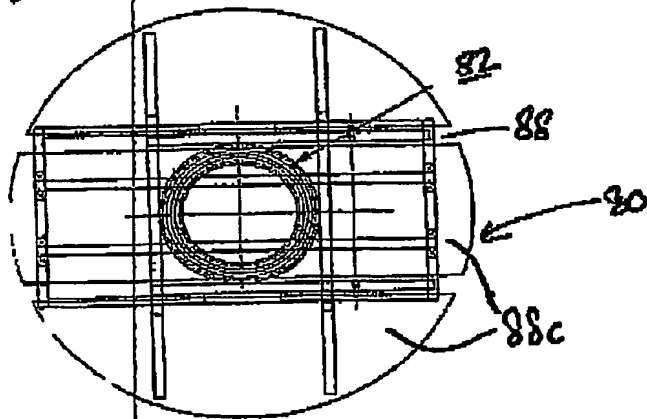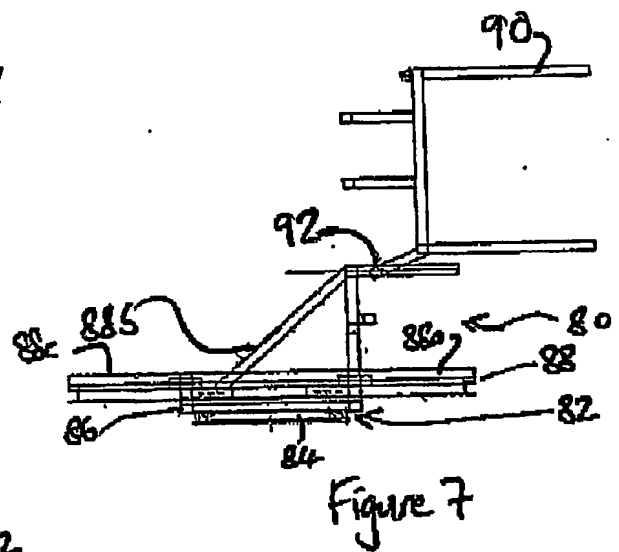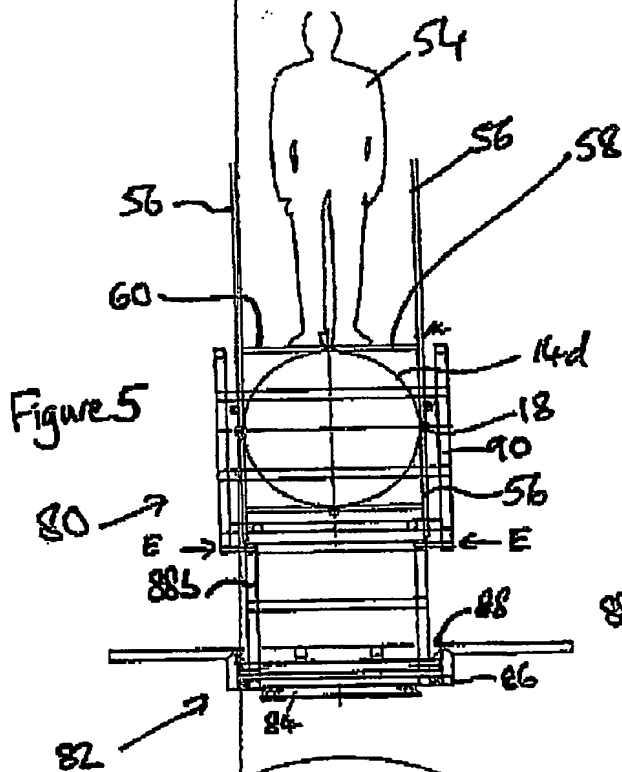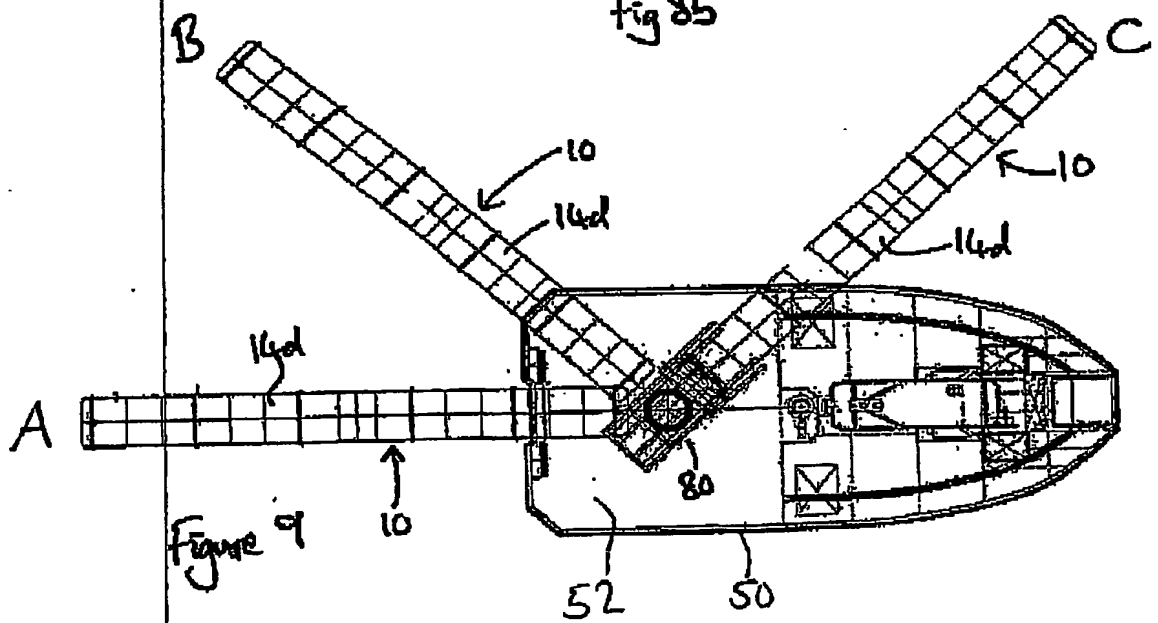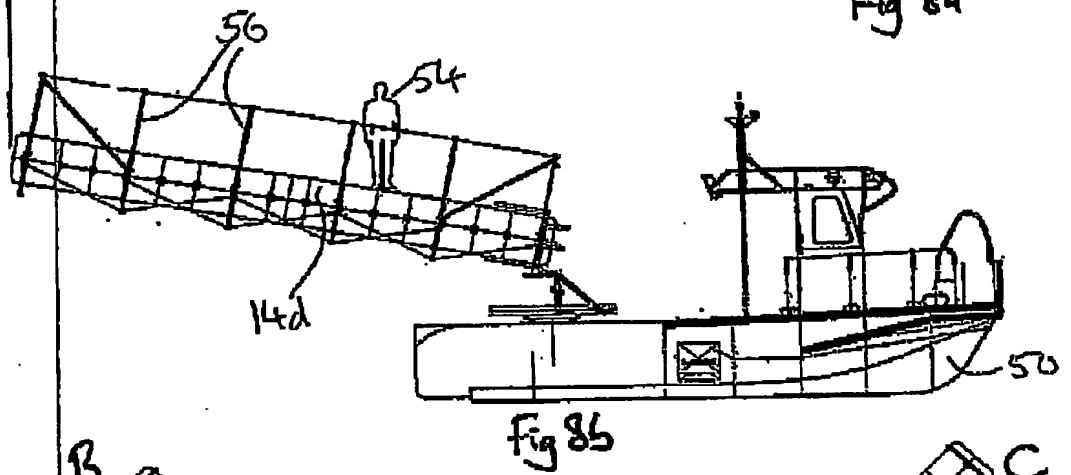




5/9

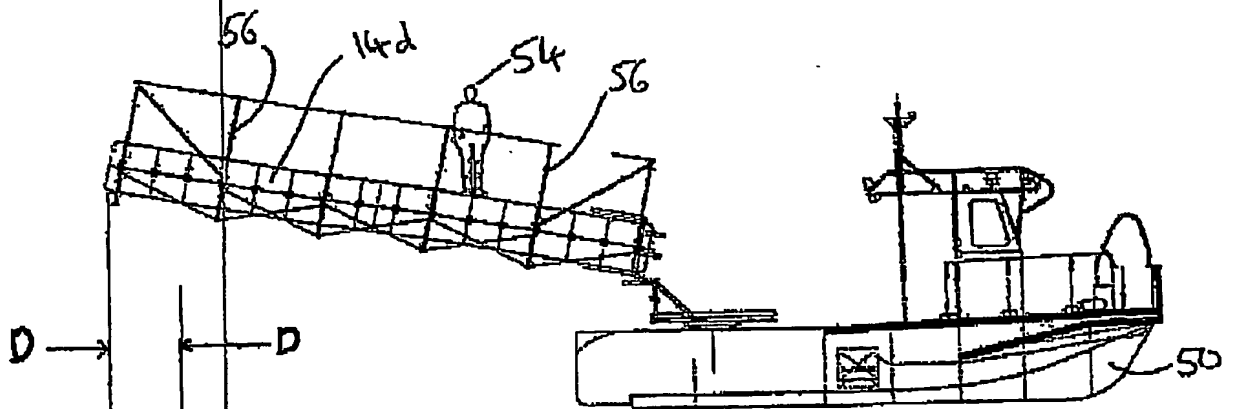



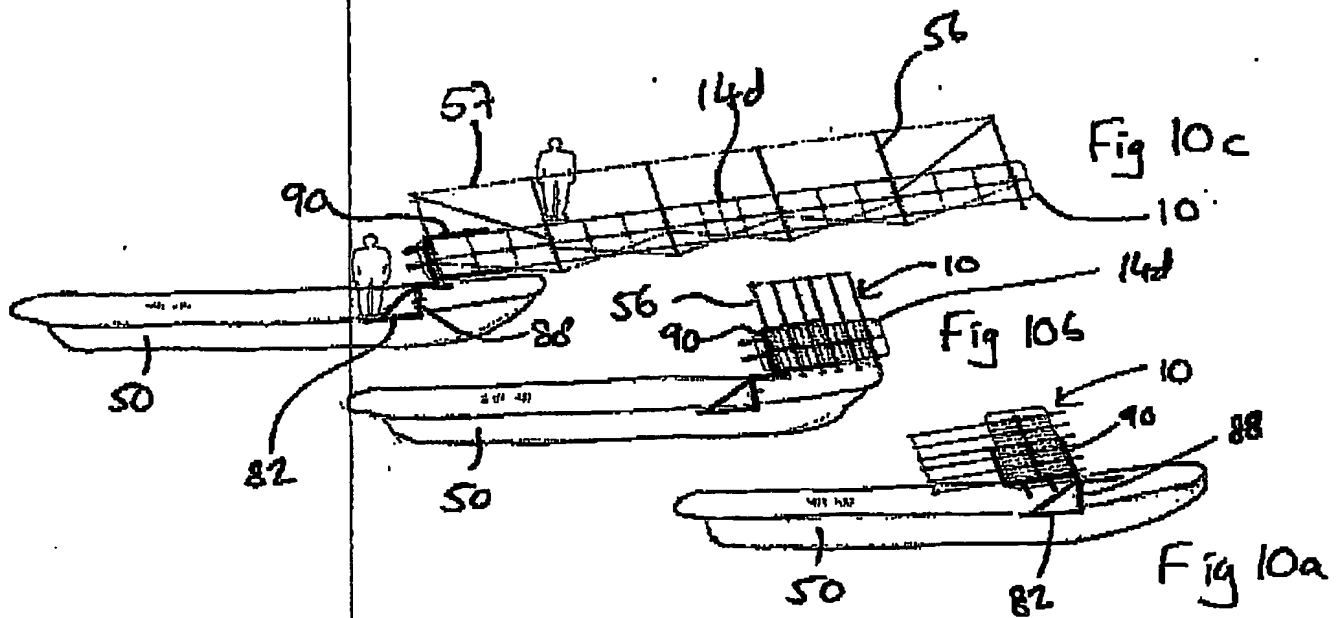

7/9

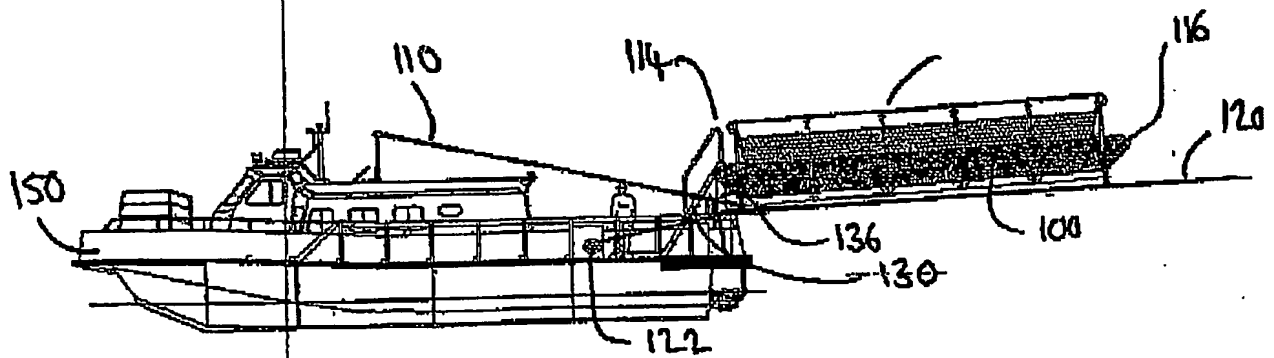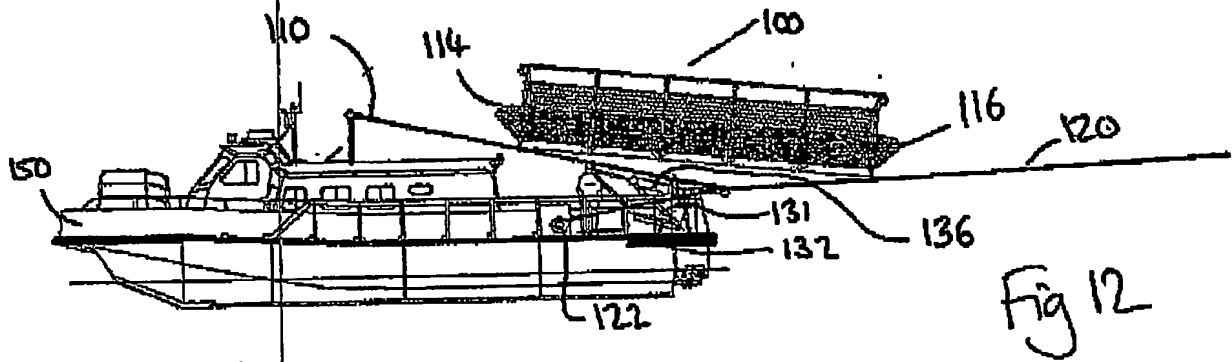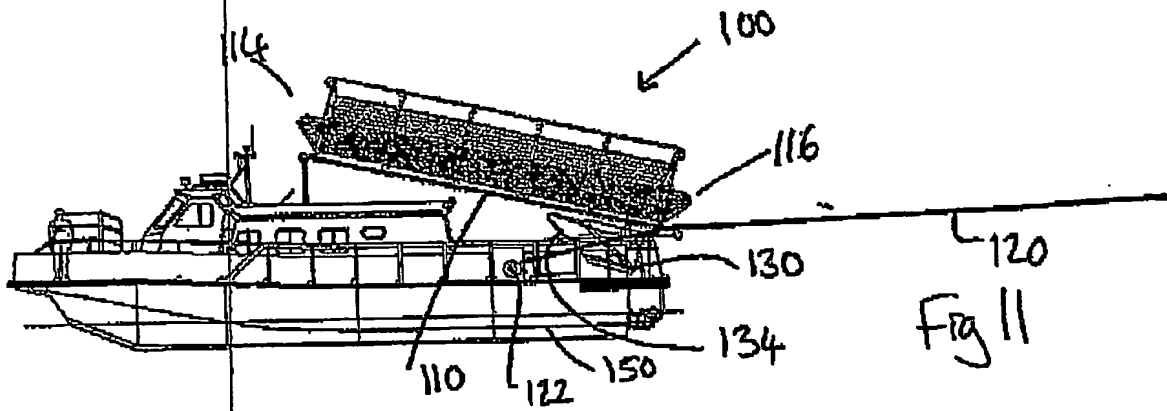

8/9

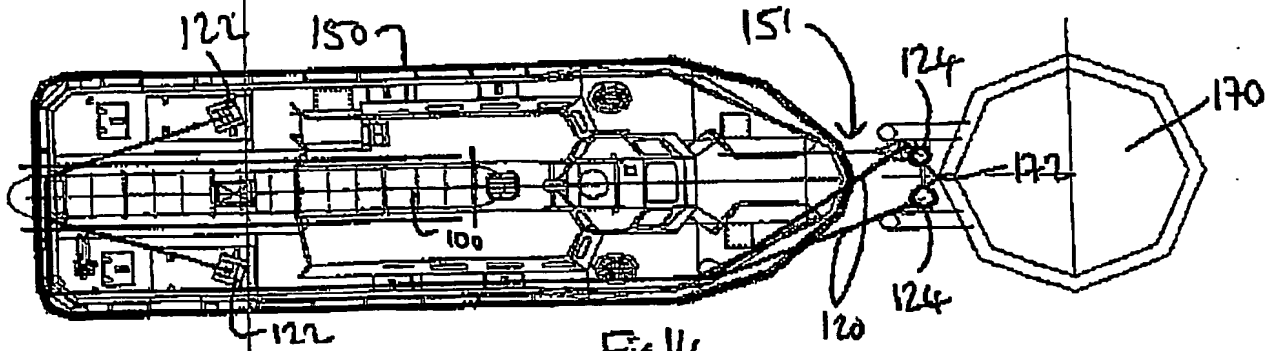


Fig 14

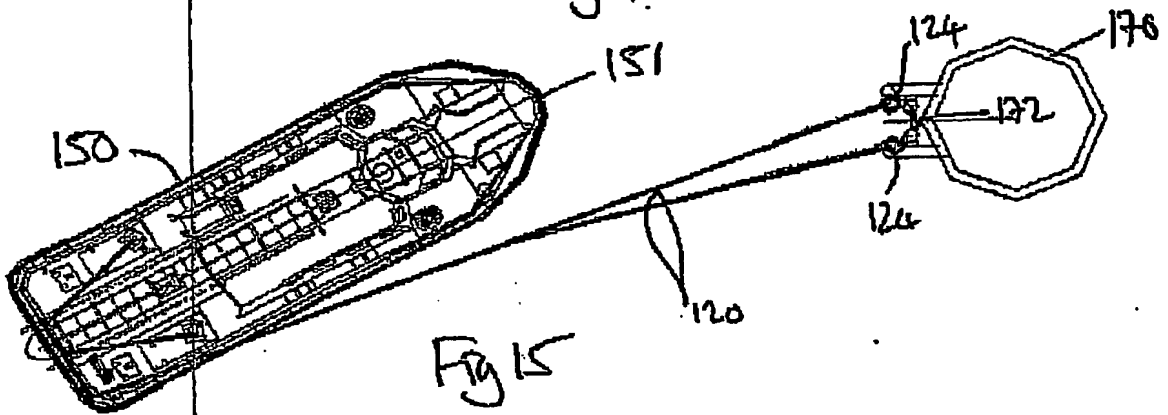


Fig 15





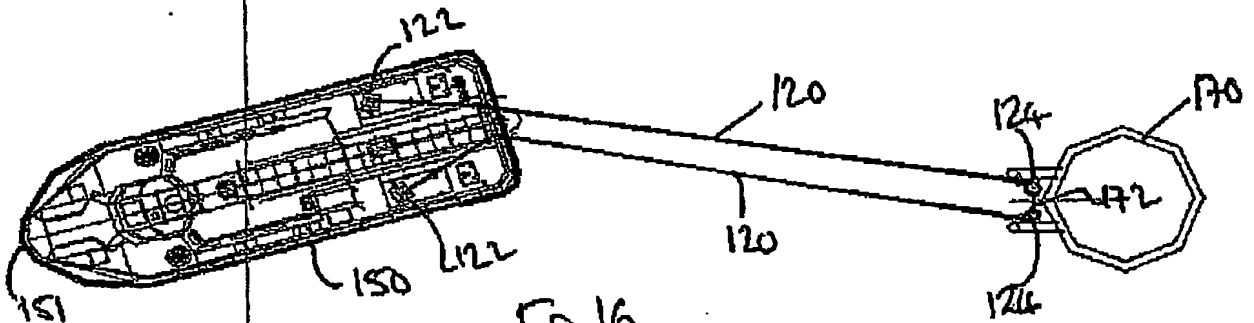


Fig 16

9/9

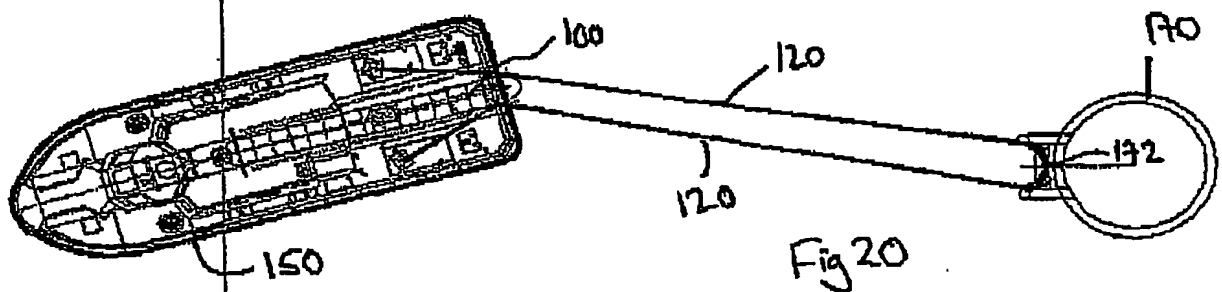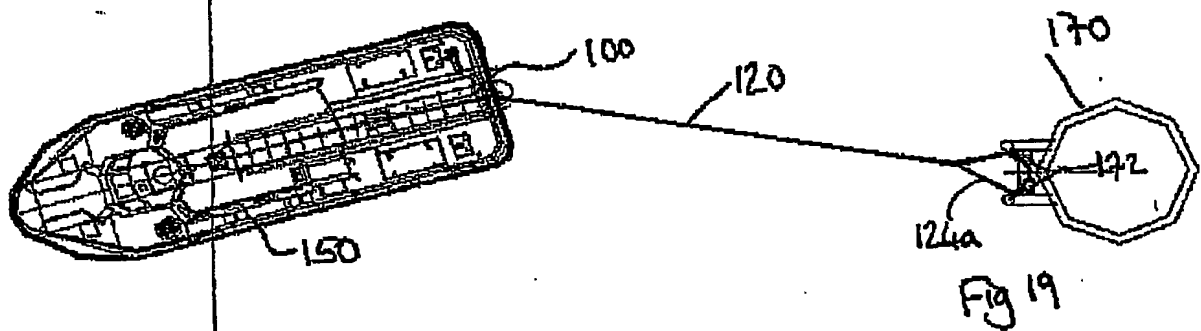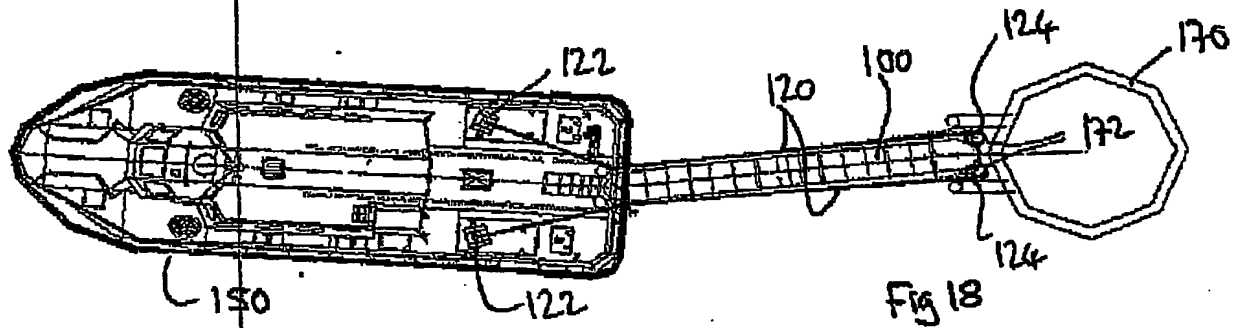

PCT/GB2004/004716

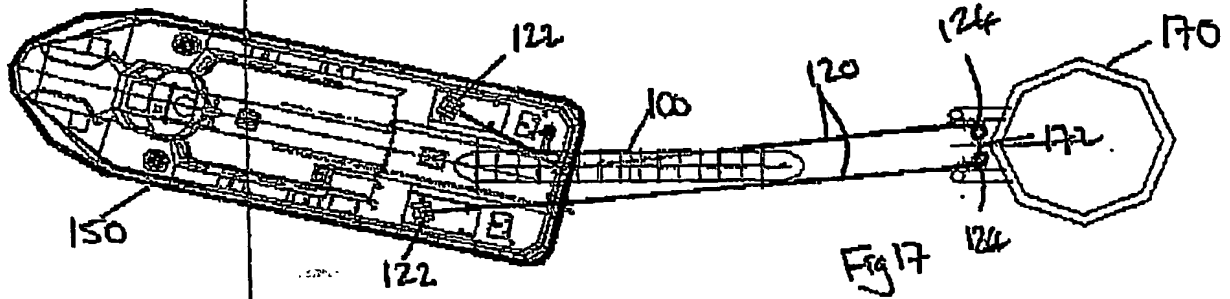

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**